

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
6 January 2005 (06.01.2005)

PCT

(10) International Publication Number
WO 2005/000589 A1

(51) International Patent Classification⁷: **B41J 2/045,**
2/055

[JP/JP]: 5-8-201, Saiwaicho, Atsugi-shi, Kanagawa,
2430012 (JP).

(21) International Application Number:
PCT/JP2004/009040

(74) Agent: ITOH, Tadahiko; 32nd Floor, Yebisu Garden
Place Tower, 20-3, Ebisu 4-chome, Shibuya-ku, Tokyo,
1506032 (JP).

(22) International Filing Date: 21 June 2004 (21.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
2003-183158 26 June 2003 (26.06.2003) JP

(71) Applicant (for all designated States except US): RICOH
COMPANY, LTD. [JP/JP]; 3-6, Nakamagome 1-chome,
Ohta-ku, Tokyo, 1438555 (JP).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, KE, KG,
KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG,
MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(72) Inventors; and

(75) Inventors/Applicants (for US only): SHINGYOHUCHI,
Mitsuru [JP/JP]; 6-27-202, Nara 3-chome, Aoba-ku,
Yokohama-shi, Kanagawa, 2270038 (JP). OHASHI,
Mikio [JP/JP]; 11-5-201, Ohmaru, Tsuzuki-ku, Yoko-
hama-shi, Kanagawa, 2240061 (JP). NODA, Hiroshi

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SE, SI,
SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: AN IMAGE FORMATION APPARATUS

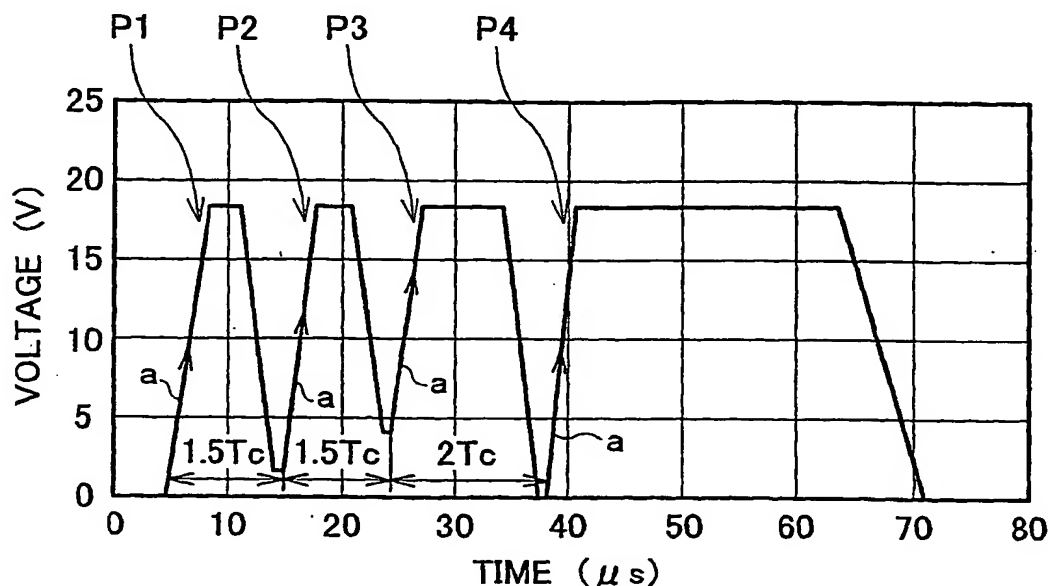

(57) Abstract: An image formation apparatus is disclosed, wherein a time interval between a first ink drop and a second ink drop is set at $1.5 \times T_c$, a time interval between the second ink drop and a third ink drop is set at $1.5 \times T_c$, and a time interval between the third ink drop and a fourth ink drop is set at $2 \times T_c$, where T_c represents the specific vibration cycle of a pressurised ink chamber.

BEST AVAILABLE COPY

WO 2005/000589 A1



Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

BEST AVAILABLE COPY